



GEN-6393A01

Network Horn Speaker

GEN-6393A01 is a network horn speaker that supports DC/POE power. It can receive calls from SIP phones or VMS platforms and handle up to 20 multicast streams. The device stores 20 audio files, offers priority management, timers, and custom actions (with HTTP API trigger).

SIP

Onvif

POE

Multicast

MAIN FEATURES

▲ Network Audio Transmission

GEN-6393A01 Supports audio signal transmission over IP networks, enabling real-time audio transmission over long distances. The device is compatible with standard audio communication protocols (such as SIP, ONVIF, and multicast), allowing seamless integration into existing communication systems and flexible adaptation to various audio systems and devices.

▲ Rich expansion interfaces

The GEN-6393A01 has a rich set of expansion interfaces and supports one alarm input channel, which can integrate third-party devices (such as cameras, infrared curtain sensors, smoke detectors, etc.) to achieve linked alarm functions. It also supports one alarm output channel and is capable of directly driving a siren. It has a built-in microphone and can achieve two-way communication.

▲ Durability and Flexible Deployment

The GEN-6393A01 adopts an ABS casing and a stainless steel bracket, with an overall protection rating of IP66, making it suitable for most outdoor environments. It is equipped with industrial-grade chips and supports stable operation within a temperature range of -20°C to 60°C, which greatly enhances the durability of the device.

SPECIFICATION

Power Parameters

Power Supply	DC12V~24V PoE (IEEE802.3af/at)
Power Cons	≤3W

Audio & Interface Parameters

Power Output	15W (Use DC 24V) 15W (Use DC12V) 15W (Use POE/POE+)
Frequency Response	400~7KHz
Sensitivity	105dB (1M/1W/1KHz)
Max SPL	116dB (1M/15W/1KHz)
SNR	90dB
Audio Trans	Multicast , ×20(Editable)
Audio Codec	Opus, PCMU (G.711u), PCMA (G.711a), G.722
Control Input	×1
Control Output	×1 ,Relay output/DC12V output switchable
Built-in Mic	×1,Electret Condenser Mic
Audio Storage	Max 20 audio files ,80MB
Audio File Format	WAV, MP3

Network Parameters

Network I/F	100BASE-TX ,RJ45 Connector
Network Protocol	TCP/IP,UDP,HTTP,RTP,RTSP ARP,ICMP,NTP,SIP,ONVIF
Config Method	Web Interface or DevConfig Tool

Mechanical & Environment Properties


Mounting Method	Wall-Mounted or Pole
Install Env	Outdoor Locations
Ingress Protection Grade	IP66
Working Temp	-20°C~+60°C
Operating Humidity	≤90% RH non-condensing
Housing Material	ABS
Color	White
Dimensions	232*163*222mm
Weight	1300g
Warranty	2 Years

ACCESSORIES

1×4pin Terminal(3.81-4P)

1 × Installation Manual


INTERFACE DESCRIPTION

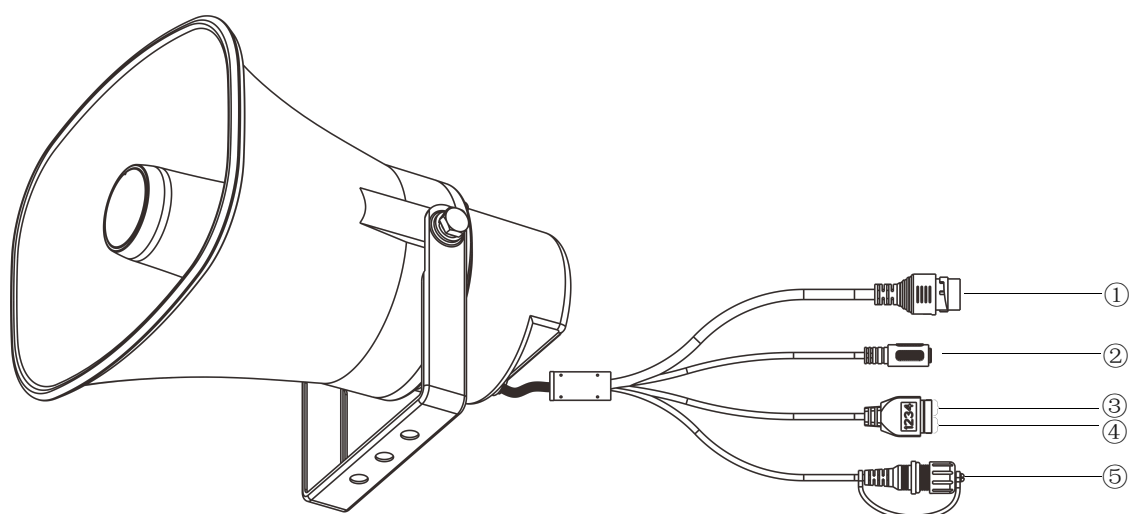

- ①RJ45 Connector
- ②Power Input Terminal
- ③Alarm Input Terminal
- ④Alarm Output Terminal
- ⑤Reset Button
- ⑥Mic




CONNECTION DIAGRAM

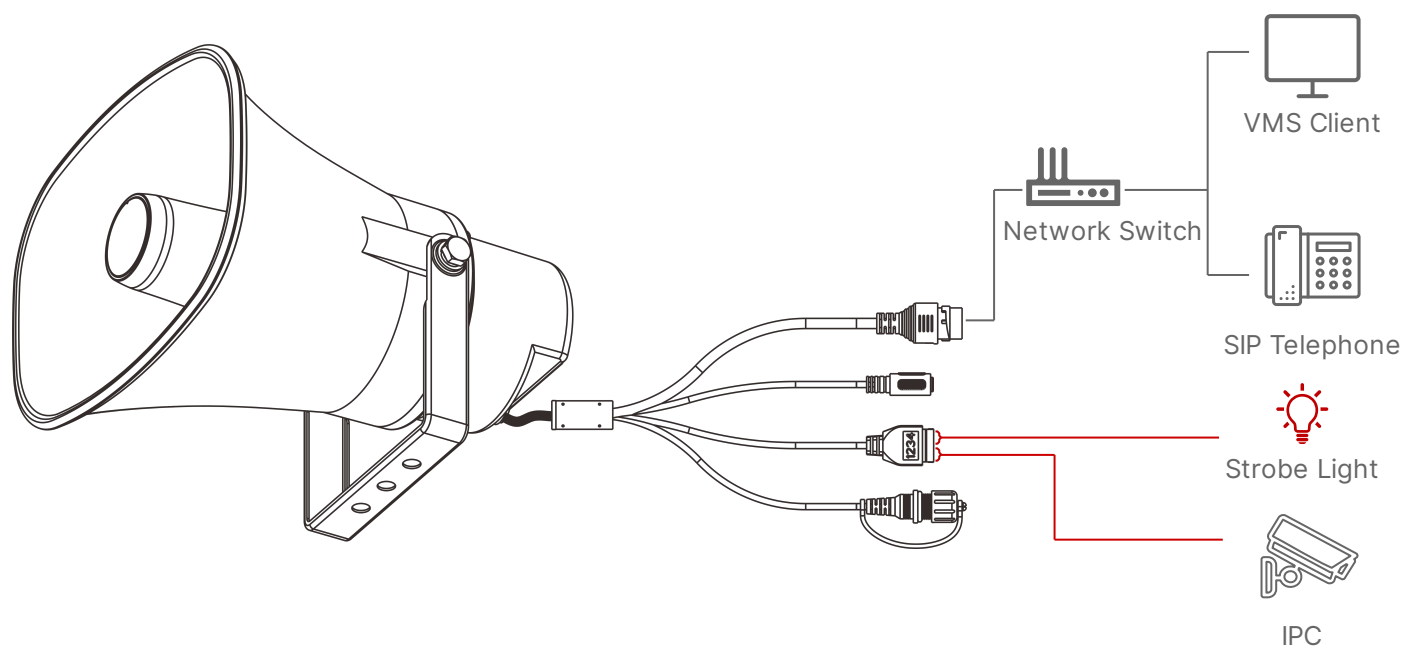


APPLICATION

The GEN-6393A01 Network Horn Speaker adopts standard industrial audio communication protocols and supports receiving audio streams via SIP, ONVIF, and multicast. The terminal features multiple I/O control interfaces (1 alarm inputs, 1 output) and supports HTTP commands, facilitating integration with third-party systems.

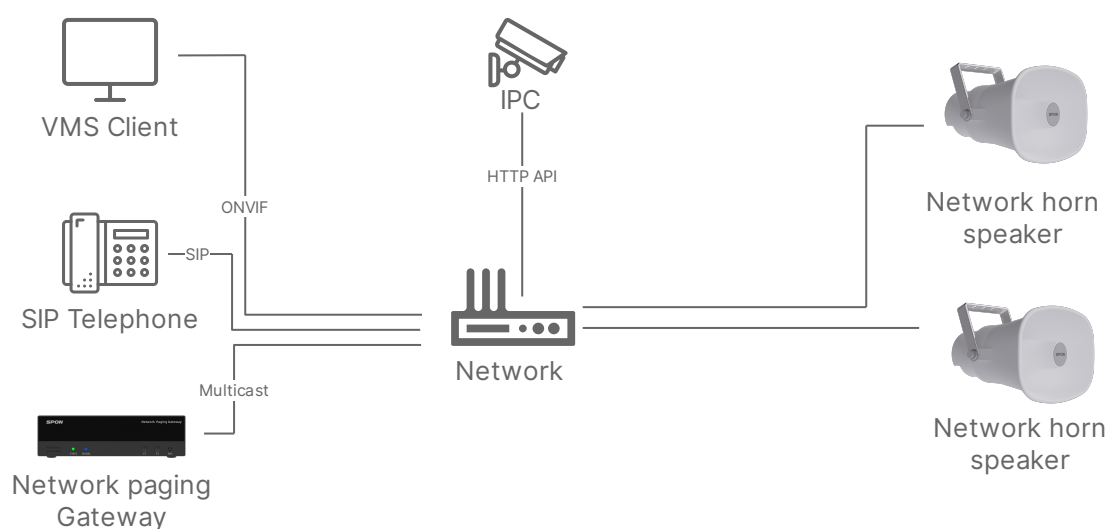


APPLICATION

The Network Horn Speaker GEN-6393A01 support paging from SIP phone by using multicast address , the multicast address and priority can be set on its webpage .

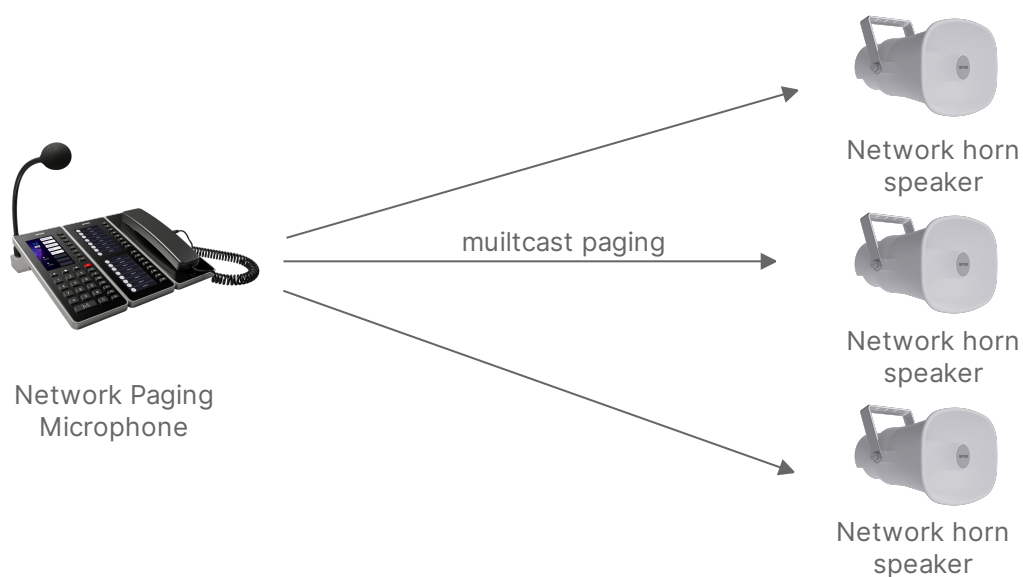

The Network Horn Speaker GEN-6393A01 support Onvif protocol which can be registered to the 3-rd party monitoring system ,and during emergency situation ,the operator can directly make a live announcement to the speaker on the monitoring platform.

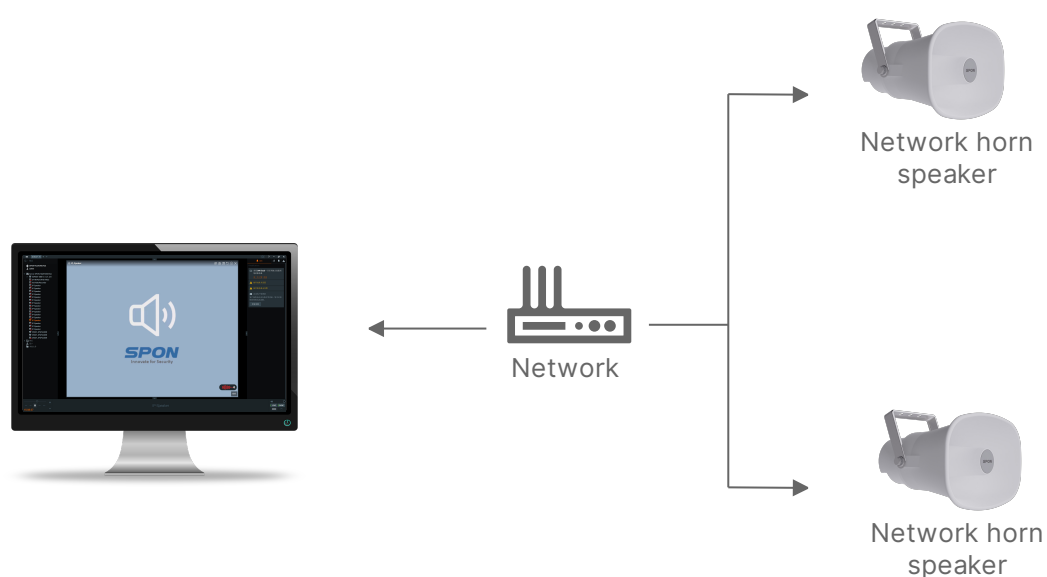

INSTALLATION

Unit: mm

